



**JK PAPER LTD**  
**BOARD DIVISION, UNIT : CPM**




**SPECIFICATION SHEET**

**Product : Pure Fil Base**

Substance (GSM) Tappi T 410 om-02 / ISO 536	Camper (µ) Tappi T 411 om-97 / ISO 534	Bulk (cm <sup>3</sup> /g)	Stiffness (Taber) g-cm Tappi T489 om-99		
			MD	CD	GM
170	213	1.25	45	21	31
175	219	1.25	48	23	33
180	225	1.25	52	24	35
<b>Tol. : ± 3%</b>	<b>± 5%</b>	<b>± 5%</b>	<b>± 15%</b>		

PARAMETER	UNIT	TEST PROCEDURE	VALUES
Plybond	(J/m <sup>2</sup> )	Tappi T 569 pm-00	> 130
Bendsten Smoothne	(ml/min)	Tappi T 479 om-81	120-200
ISO Brightness TS	(%)	ISO 2470	83 (Min)
C.I.E. Whiteness	(%)	ISO 11476	97 (Min)
Edge Wick	(g/m/hr)		0.8 max.
Cobb 60 - T/S	g/m <sup>2</sup>	Tappi T441 om-98 / ISO 535	25 ± 5
B/S	g/m <sup>2</sup>	Tappi T441 om-98 / ISO 535	25 ± 5
Moisture			.
175 -180 gsm	(%)	Tappi T412 om 02 / ISO 287	5.0 -6.5

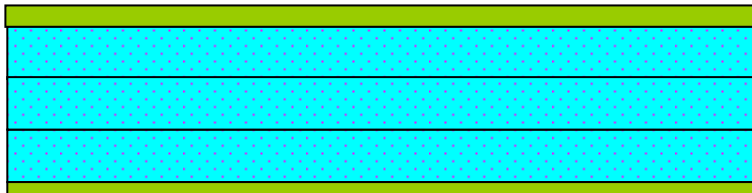

Surface sizing

Virgin Chemical Pulp (TCF)

Virgin Chemical Pulp (TCF)

Virgin Chemical Pulp (TCF)

Surface sizing





